

IRC series
C12-G2x
8-pin, Interface relays, 2-poles, plug-in faston

Type	C12-G2x/ ... V Standard relay 2 open contacts		
Maximum contact load	5 A/250 V AC1	0,8 A/110 V DC1	
	5 A/30 V DC1	0,4 A/220 V DC1	
Recommended minimum contact load	1 mA/10 V (with 10 μ Au) 10 mA/10 V (standard contact)		

Contacts			
Material	Standard	Code 1	AgNi + 0,2 μ Au
	Optional	Code 2	AgNi + 10 μ Au
Rated current	5 A		
Switch-on current max. (20 ms)	15 A		
Switching voltage max.	250 V		
AC load	1,2 kVA		
DC load	see Fig. 2		

Coil			
Coil resistance	see table; tolerance \pm 10 %		
Pick-up voltage	$\geq 0,8 \times U_N$		
Release voltage	$\geq 0,1 \times U_N$		
Nominal power	1,1 VA (AC)/0,7 W (DC)		

Coil table						
	VAC	Ω	mA	VDC	Ω	mA
	24	290	45	12	224	53
	48	1200	23	24	742	32
	115	7.300	9,5	48	3.500	13,7
	230	28.800	4,7	110	19.900	5,5


Insulation	Volt rms, 1 min
Contact open	2000 V
Contact/contact	3000 V
Contact/coil	5 kV
Insulation resistance at 500 V	≥ 3 G Ω
Insulation, IEC 61810-5	4 kV/3

Specifications	
Ambient temperature operation/storage	-40 (no ice)...60 $^{\circ}$ C /-40 ... 80 $^{\circ}$ C
Pick-up time/bounce time	10 ms/ \leq 1 ms
Release time/bounce time	8 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
AC voltage endurance at rated load	≥ 100000 switching cycles
Switching frequency at rated load	≤ 1200 /h
Protection class	IP40
Weight	21 g

Standard types		
AC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	C12-G21/AC ... V	C12-G22/AC ... V
LED	C12-G21X/AC ... V	C12-G22X/AC ... V
RC suppressor	C12-G21R/AC ... V	C12-G22R/AC ... V
DC 12, 24, 48, 110	C12-G21/DC ... V	C12-G22/DC ... V
LED	C12G21X/DC ... V	C12-G22X/DC ... V
Polarity and free wheeling diode	C12-G21FX/DC ... V	C12-G22FX/DC ... V
AC/DC bridge rectifier 24 V, 48 V, 60 V	C12-G21BX/UC ... V	C12-G22BX/UC ... V

"..." Enter the voltage for full type designation

Accessories	
Socket:	S12, S12-P



Connection diagram

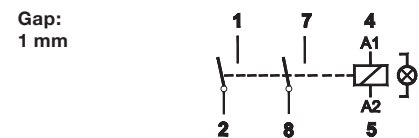


Fig. 1 AC voltage endurance



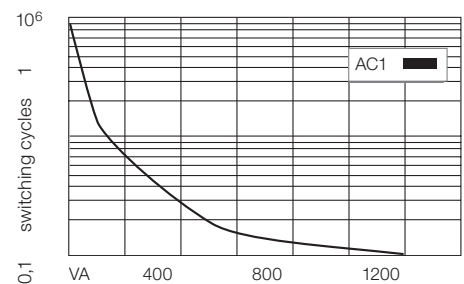


Fig. 2 DC load limit curve

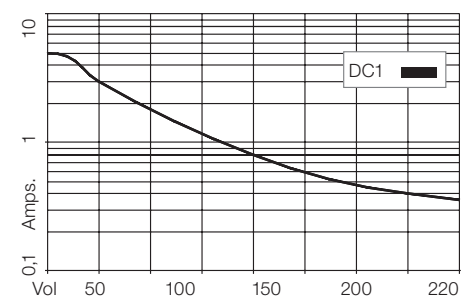

Dimensions [mm]

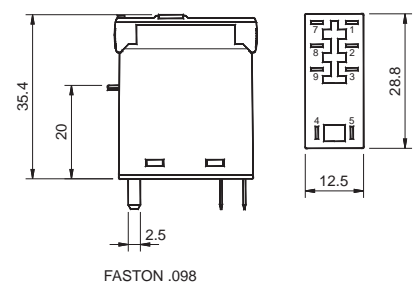

Technical approvals, conformities



IEC 61810; EN 60947



Kühn Controls AG

Notes:

You want more information about this product, please call us: tel: +49 (0)7082-940000 or send us a fax: +49 (0)7082-940001, or email: sales@kuehn-controls.de or visit our Website: www.kuehn-controls.de