QRC series
S7-M
Socket for miniature 2 pole relay C7-…

Type	**S7-M** 2-pole, 1 level Integrated clip and marking label
Rated current	**10 A**
Specifications	
Rated load	6 A/250V
Insulation	Test voltage V rms 1 min
– All terminals/DIN rail	2,5 kV
– Terminal/terminal	2,5 kV
Cross-section of connecting wire	
– Single-wire	4 mm^2 or 2 x 2,5 mm^2
– Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C7
Labelling space	detachable
Connection label	1...11; DIN/EN
Mounting	DIN rail TS35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)….60 ºC /-40 ... 80 °C
Associated, plug-in 8-pin QRC relays	**C7-A2x, C7-T, C7-G, C7-X, C7-W, C7-H**

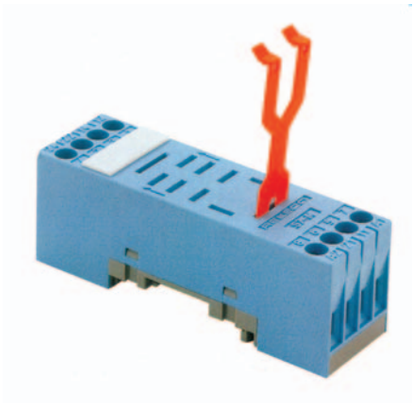

Connection diagram

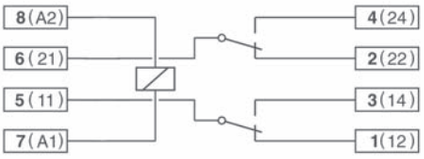

Dimensions [mm]

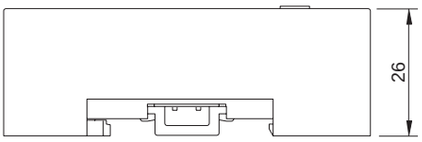

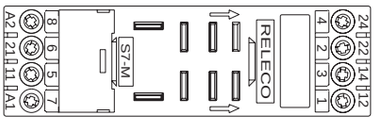

Technical approvals, conformities

EN 60947-1, EN 61810-5

Kühn Controls AG

Notes:

You want more information about this product, please call us: tel: +49 (0)7082-940000 or send us a fax: +49 (0)7082-940001, or email: sales@kuehn-controls.de or visit our Website: www.kuehn-controls.de